

4

3





2

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGE PER ECN 939.	5-17-05	D. CAPKA
B	CHANGE G/N 4.	6-14-05	D. CAPKA
C	ADD G/N 7 & 8, CHG G/N 1.	7-19-05	D. CAPKA

NOTES:

- 1.) DO-160E Env. Cat. [F2X]BBB[SBM]HXXXXZ[BZ]AZ[ZC][RR]M[Z2XXX]XXAX
- 2.) SOFTWARE MEETS THE REQUIREMENTS OF RTCA DO-178B, LEVEL E.
- 3.) INSTALL PER INSTALLATION INSTRUCTIONS, HEADS UP TECHNOLOGIES DOCUMENT XMD076A-3A.
- 4.) NOMINAL VOLTAGE RANGE: 11-32 VDC  
MAX LOAD AT 13.8 VDC: 0.55 A  
MAX LOAD AT 27.5 VDC: 0.30 A
- 5.) UNIT WEIGHT IS APPROX 1.70 LBS
- 6.) THIS IS AN INSTALLATION CONTROL DRAWING THAT REFERENCES HEADS UP TECHNOLOGIES PART NUMBER XMD076A-01
- 7.) CHANGES OR MODIFICATIONS TO THIS DEVICE NOT EXPRESSLY APPROVED BY THE MANUFACTURER COULD VOID THE USERS AUTHORITY TO OPERATE THE EQUIPMENT.
- 8.) FCC IDENTIFICATION: TGVXMSC63

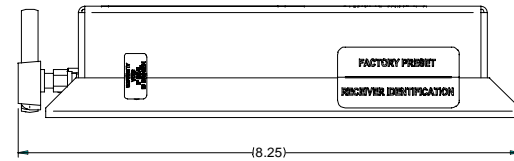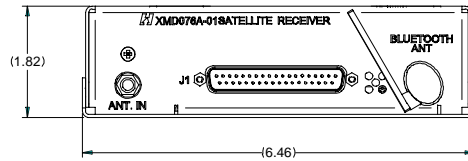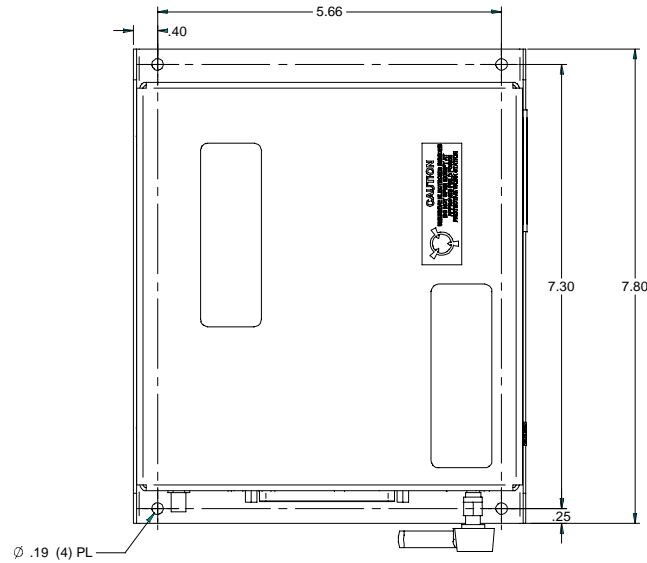

1	1	XMD076A-01	ASSEMBLY DRAWING PACKAGE XMD076A-01.ASM		
QTY	ITEM NO	PART NUMBER	DESCRIPTION	SPECIFICATION	NOTES

PARTS LIST

UNLESS OTHERWISE SPECIFIED • DIMENSIONS ARE IN INCHES • TOLERANCES: ANGLES ±1° 3 PLACE DECIMALS ±010 2 PLACE DECIMALS ±02 • INTERPRET DRAWING PER DDG-1000 • REMOVE ALL BURRS AND SHARP EDGES • CONCENTRICITY MACHINED DIAMETERS .010 FIM • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • PARENTHETICAL INFO FOR REF ONLY		DWN: D. CAPKA DATE: 5-8-05 CHECK: D. CAPKA DATE: 5-8-05 ENGR: D. CAPKA DATE: 5-8-05 APPROVED: DATE: RELEASED: DATE:	<b>H HEADS UP TECHNOLOGIES</b> 2033 Chermant Drive Suite 100 Carrollton, TX 75006 (972) 407-1131 <b>INTERFACE CONTROL DRAWING (ICD)</b> <b>XM BLUETOOTH DATA RECEIVER</b>
HOLE DIAMETER TOLERANCE .013 THRU .004 1/28 THRU .005 2/51 ± .006 .125 THRU .001 250 THRU .001 .500 .001 .501 THRU .008 751 THRU .010 1.001 ± .012 .750 THRU .001 1.000 THRU .001 2.000		<b>SIGNATURES ON FILE</b> CONTRACT: XMD076A-01-ICD_C.dft DRAWING NO: XMD076A-01-ICD PROJECT:	
USED ON	NEXT ASSY	SCALE: NONE REV: C SHEET 1 OF 1	

4

3

2

1

D

C

B

A

D

C

B

A

A